

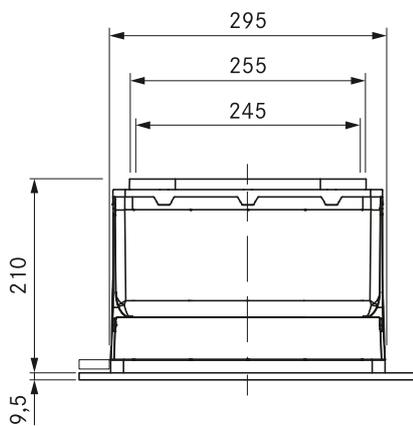
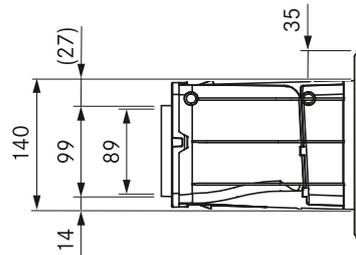


# UEBF/1

BORA 3box wall sleeve incl. sealing material

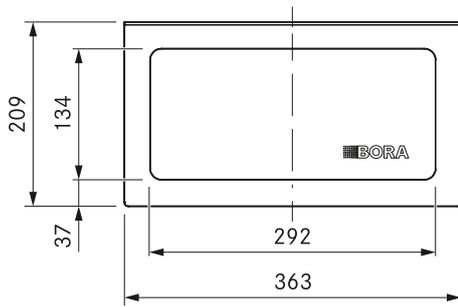

## Technical data

Wall sleeve dimensions (WxDxH)	290 x 210 x 140 mm
Cover dimensions (WxDxH)	363 x 7.5 x 209 mm
Weight (incl. accessories/packaging)	approx. 2, 8 kg
Material	Plastic / stainless steel
duct connection	BORA Ecotube
U-value according to EN ISO 12567-1	1,1 W/(m <sup>2</sup> K)

## Product description

- Optimal extraction performance with the lowest possible noise level
- Purely mechanical operation
- Two flaps with EPS insulation
- Outstanding insulation value
- Integrated water drainage to the outside
- Low pressure resistance during operation
- Optimised opening pressure
- UV resistant materials
- 100% tight without additional taping
- Including required Ecotube seals

## Scope of delivery

- UEBF BORA 3box
- 6 x mounting wedges made of EPS
- operating and installation instructions
- 1 x flat seal EFD

## Accessories





- BORA 3box wall sleeve safety guard UEBFES

## product- and planning instructions

- Wall opening: 310 x 155 mm
- Ecotube duct connection with a shallow sleeve form
- Suitable for a minimum wall depth of 200 mm
- The wall sleeve must not be installed rotated 180°, vertical or with the exhaust opening facing downwards
- The safety guard UEBFES is to be used if the distance between the fan exhaust opening and the wall sleeve exhaust opening is less than 900 mm in the case of a straight exhaust duct
- Must expel air in a straight line regardless of the weather conditions

# UEBR/1

BORA 3box wall sleeve round incl. sealing material

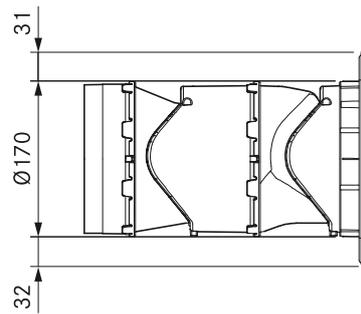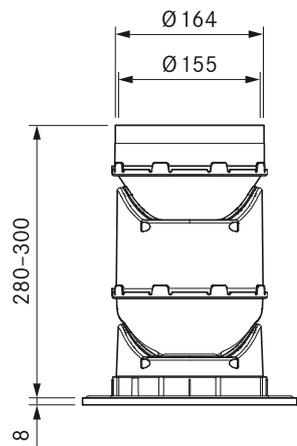

## Technical data

Wall sleeve dimensions (WxDxH)	Ø 170 x 280 - 300 mm
Cover dimensions (WxDxH)	234 x 8 x 234 mm
Weight (incl. accessories/packaging)	Approx. 2.0 kg
Material	Plastic / stainless steel
duct connection	BORA Ecotube
U-value according to EN ISO 12567-1	1,5 W/(m²K)

## Product description

- Purely mechanical operation
- Two flaps with EPS insulation
- Outstanding insulation value
- Shortenable sleeve design
- Optimised opening pressure
- Reduced installation effort
- Plaster cover
- Integrated water drainage to the outside
- Low pressure resistance during operation
- UV resistant materials

## Scope of delivery

- BORA 3box UEBR
- Plaster cover
- installation instructions
- 1 x round seal ERD

## Accessories

- BORA 3box wall sleeve round safety guard UEBRES

## product- and planning instructions

- Core hole diameter Ø180 mm
- Duct connection Ecotube with a round bushing design
- Bushing length 45 mm (can be shortened by 20 mm)
- Suitable for a minimum wall depth of 280 mm
- The wall sleeve must not be installed rotated 180°, vertical or with the exhaust opening facing downwards
- The safety guard UEBRES is to be used if the distance between the fan exhaust opening and the wall sleeve exhaust opening is less than 900 mm in the case of a straight exhaust duct
- Must expel air in a straight line regardless of the weather conditions